

HCL2GV/HCW2GV

Network TDN Low-Light WDR
2MP Box Camera



HD ONVIF | SGG

OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive scan
IMAGE SENSOR	1/2.8" 2 Megapixel progressive scan CMOS
NUMBER OF PIXELS (H x V)	2MP - 1920x1080
MINIMUM ILLUMINATION	Color: 0.001Lux @f/1.6, B/W: 0.001Lux @f/1.6
S/N RATIO	50 dB minimum
ELECTRONIC SHUTTER SPEED	Auto/Manual, 1/3-1/100000s
DAY/NIGHT	Mechanical ICR (ON/OFF/AUTO selectable)
BACKLIGHT COMPENSATION	BLC/HLC/WDR/SAC (Scene Adaptive Control)
DYNAMIC RANGE WIDTH	HCL2GV: 140dB (50/60fps off) HCW2GV: 120dB (50/60fps off)
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/Customize Region
GAIN CONTROL	Auto/Manual
NOISE REDUCTION	3D Noise Reduction (ON/OFF selectable)
PRIVACY MASKING	Up to 4 configurable areas
ELECTRONIC IMAGE STABILIZATION	HCW2GV: Not supported HCL2GV: ON/OFF
DEFOG	Auto/Manual/Off
LENS	Option, support DC-Iris
AUDIO/TWO-WAY	Line In/Out, 1 Built-in Mic
ALARM INPUT/OUTPUT	2 in/1 out
ANALOG OUTPUT SUPPORT	Supported
ETHERNET	HCW2GV: RJ-45 (10/100 Base-T) HCL2GV: RJ-45 (100/1000 Base-T)
IP SPECIFICATIONS	
VIDEO COMPRESSION	H.265+, H.265, H.264 and MJPEG bit rate control (CBR and VBR)
RESOLUTION	16:9 1080p (1920x1080)/ 720p (1280x720)
	4:3 1.3M (1280x960)/VGA (640x480)
	OTHER D1 (704x576/704x480)/CIF (352x288/352x240)
FRAME RATE	MAIN STREAM 1080P (1~50/60fps WDR off)
	SUB STREAM D1 (1~50/60fps WDR off)
	THIRD STREAM HCL2GV: 1080P (1~50/60fps WDR off) HCW2GV: 1080P (1~25/30fps)
AUDIO COMPRESSION	G.711a/G.711Mu/AAC/G.726
AUDIO STREAM	Full duplex, simplex
SUPPORTED WEB BROWSERS	IE11/Chrome (with application)/Firefox (earlier than 52.0 version)
SUPPORTED OS	Windows® 7 32-bit/64-bit; Windows® 10 32-bit/64-bit
SUPPORTED PROTOCOLS*	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; SNMP
COMPATIBILITY	ONVIF Profile S, G and Q
MAXIMUM USERS ACCESS	20 users

IP SPECIFICATIONS (CONT.)	
SECURITY	User account and password protection HTTPS, IP Filter, IEEE 802.1x, Digest authentication, User access log, TLS1.2, AES-256, SSH/Telnet closed, FTP disabled, PCI-DSS compliance, Hardware chipset for private key
HEAT MAP	HCL2GV: Support
BUILT-IN ALARM & EVENT	EVENT TYPE HCW2GV: Motion Detection/Video Tampering/Face Detection/SD Card Error/SD Card Capacity Warning/Audio Detection/ Object Abandoned/ Object Missing/Tripwire/Intrusion HCL2GV: Motion Detection/Video Tampering/Face Detection/SD Card Error/SD Card Capacity Warning/Audio Detection/Object Abandoned/ Object Missing/People counting
	EVENT LINKAGE Recording on SD card, Relay output, Email, Snapshot
	EVENT OUTPUT ONVIF, ISOM
UPLOADABLE VIDEO ANALYTICS (HCL2GV ONLY)	BASIC Trigger line/Intrusion/Loitering available now (Please download from www.honeywellvideo.com. Free of Charge, but please email to VALicensing@Honeywell.com to get license.)
	ADVANCED LICENSED ANALYTICS OUTPUT IntrusionTrace/LoiterTrace for advanced applications coming soon. (Need to purchase separately) ISOM event output, Metadata
MICRO SD	microSDHC Capacity Max 32 GB microSDXC Capacity Max 128 GB
MICRO SD FUNCTION	<ul style="list-style-type: none"> Event trigger recording Continuous and scheduled recording Automatic recording when network fails
LANGUAGES SUPPORTED	English, Arabic, Czech, Dutch, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Turkish
ELECTRICAL	
POWER SUPPLY	PoE (802.3af) Class 0/12 VDC/24 VAC
LONG DISTANCE POE SUPPORT	3X PoE (300m @100Mbps)
AC FREQUENCY	50/60 Hz
POWER CONSUMPTION	HCW2GV: Max 10W HCL2GV: Max 9.5W
AUXILIARY POWER SUPPLY	2.0W, DC12V (+/-5%)
MECHANICAL	
DIMENSIONS	125.0x75.8x69.0 mm (4.92x2.98x2.72 in.)
WEIGHT	HCW2GV: Product weight: 535g (1.18lb); Package Weight: 756g (1.67lb) HCL2GV: Product weight: 534g (1.18lb); Package Weight: 755g (1.66lb)
CONSTRUCTION	Die-cast aluminum housing with powder coat
CONSTRUCTION COLOR	RAL 9003 (White) and RAL 7022 (Grey)
ENVIRONMENTAL	
OPERATING TEMPERATURE	-30°C to 60°C (-22°F to 140°F)
RELATIVE HUMIDITY	0% to 95%, non-condensing
REGULATORY	
EMISSIONS	FCC Part 15, CE (EN 55032); Complies with RCM (AS/NZS)
IMMUNITY	CE (EN 50130-4)
SAFETY	North America UL Listed to UL/CSA 60950-1, CE (EN 60950-1)
ROHS	EN50581

* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

Network TDN Low-Light WDR 2MP Box Camera

RECOMMENDED ACCESSORIES

SYSTEM INTEGRATION

ONVIF support and open API software integration. Refer to www.onvif.org for the ONVIF specification and the Honeywell Open Technology Alliance website (<http://www.security.honeywell.com/hota/>) to learn more about our open and integrated solutions.



HOUSING AND MOUNTS

HLM105V42MPD



12 Megapixel 4K, 10.5 – 42 mm Lens

HLM5V50MPDE



6MP, 1/1.2.7", F1.6, 5.0 – 50mm CS lens

HLM37V16MPD



12 Megapixel 4K, 3.7 – 16 mm Lens

HLM27V12MPD



4 MP, 1/2.7", F1.6, 2.7 – 12.0 mm CS Lens

HBC5WT-2



Box Camera Wall Mount

HPOE3X



3X Long Distance POE Switch

HLR1001




IP over Coax Converter

ORDERING

HCL2GV	Network TDN Intelligent Ultra WDR Box Camera, 1/2.8" 2 Megapixel progressive scan CMOS, PoE, H.265.
HCW2GV	Network TDN Low Light WDR Box Camera, 1/2.8" 2 Megapixel progressive scan CMOS, PoE, H.265.

DIMENSIONS

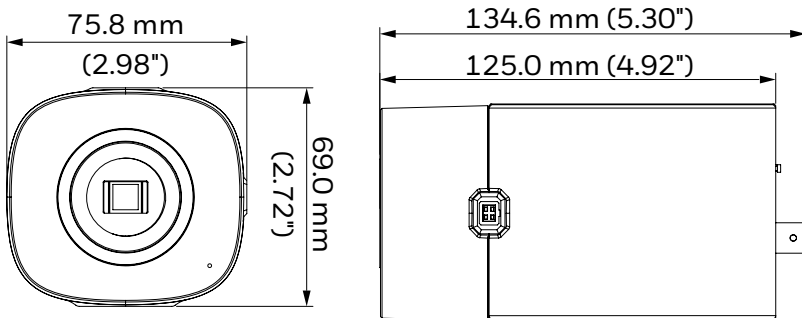

For more information

www.honeywellvideo.com

Honeywell Security and Fire

2700 Blankenbaker Pkwy, Suite 150
 Louisville, KY 40299
 1.800.323.4576
www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

L/HCX2GVD/D | 06/18
 © 2018 Honeywell International Inc.

